



VRF 1-way cassette indoor unit type GMV-NDTD

- Cassette type VRF indoor unit with low noise design, wired or infrared remote control

Product

- Indoor unit, 1-way cassette

Application

- **Cooling or Heating** of offices, rooms or shops,...

Function

- Heatpump or Only Cooling, Inverter

Refrigerant

- R410A


Features

- Built-in drain pump
- Washable filter
- Quiet function
- Compact design
- Easier maintainability

Applicable outdoor units

- GMV-WLA
- GMV-WLB
- GMV-WM
- GMV-QWM
- GMV-SWL

			Specifications					
Model			GMV-ND22TD/A-T	GMV-ND28TD/A-T	GMV-ND36TD/A-T	GMV-ND45TD/A-T	GMV-ND50TD/A-T	GMV-ND56TD/A-T
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.0	5.6
	Heating	kW	2.5	3.2	4.0	5.0	5.6	6.3
Power supply	220-240V / 1Ph / 50Hz & 208-230V / 1Ph / 60Hz							
Power consumption	W		30	30	30	45	45	45
Airflow volume (H/M/L)	A	m ³ /h	600/500/400	600/500/400	600/500/400	830/600/500	830/600/500	890/667/564
			0.2	0.2	0.2	0.3	0.3	0.3
Rated current	Cooling	A	0.2	0.2	0.2	0.3	0.3	0.3
	Heating	A	0.2	0.2	0.2	0.3	0.3	0.3
Sound pressure level (H/M/L)	dB(A)		36/32/28	36/32/28	36/32/28	40/35/30	40/35/30	41/38/35
Connecting pipe diameter	Liquid	mm	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø9.52
	Gas	mm	Ø9.52	Ø12.7	Ø12.7	Ø12.7	Ø12.7	Ø15.9
Drain pipe	External diameter	mm	Ø25	Ø25	Ø25	Ø25	Ø25	Ø25
	Thickness	mm	2.5	2.5	2.5	2.5	2.5	2.5
Main body	Dimensions (W x D x H)	mm	987 x 385 x 178	987 x 385 x 178	987 x 385 x 178	987 x 385 x 178	987 x 385 x 178	987 x 385 x 178
	Weight	kg	20.0	20.0	20.0	21.0	21.0	21.0
Panel	Dimensions (W x D x H)	mm	1200 x 460 x 55	1200 x 460 x 55	1200 x 460 x 55	1200 x 460 x 55	1200 x 460 x 55	1200 x 460 x 55
	Weight	kg	4.2	4.2	4.2	4.2	4.2	4.2

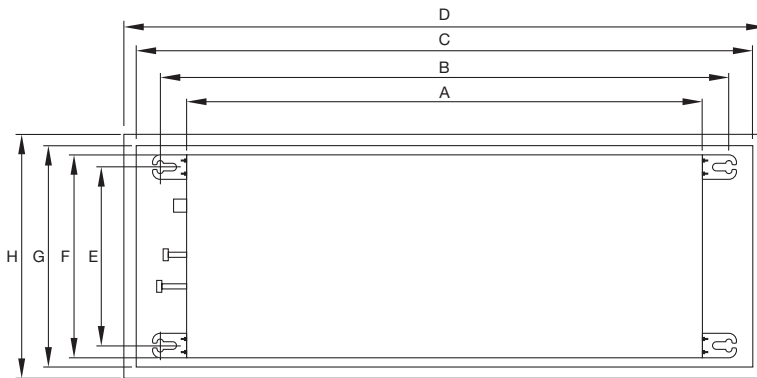

	Dimensions							
	A	B	C	D	E	F	G	H
GMV-ND22TD/A-T	927	1027	1115	1200	261	385	418	456
GMV-ND28TD/A-T	927	1027	1115	1200	261	385	418	456
GMV-ND36TD/A-T	927	1027	1115	1200	261	385	418	456
GMV-ND45TD/A-T	927	1027	1115	1200	261	385	418	456
GMV-ND50TD/A-T	927	1027	1115	1200	261	385	418	456
GMV-ND56TD/A-T	927	1027	1115	1200	261	385	418	456